

IP-HD Megapixel iP4 POE Series

Model: **iV-D21VWA-iP4-POE**



iV-Pro Model: iV-D21VWA-iP4-POE is a Vandal Metal Indoor 4 Megapixel 1580p Full iP-HD POE Security Camera with the next generation Sony IMX 423 Series image processing solution engineered to provide extremely crisp and clear images at minimal bandwidth. This Series includes a wide range of high performance lens that are built to deliver exceptional video images with true vivid colors and wide and clearer night vision, thanks to the new Array IR technology that promises better results and a longer life span over any Cat6 Cable with iV-Pro's POE Switches which can achieve a distance of up to 100 Meters to 250 Meters including long distance transmission of up to 20 Kilometers using Fiber Optic Cables with iV-Pro s Fiber Port Switches.


Features

- 4 Megapixel 1580p Full HD Resolution with Array IR up to 25 Meters
- H.265++ Compression with low bandwidth data for longer recordings
- Flexible choice of 4MP M12 lens from 3.6mm, 4.0mm and 6.0mm
- Smart SMT IR technology provides even distribution of IR light
- Plug and Play Compatible with iV-Pro's range of NVRs
- In Built chipset attached microphone for audio detection
- Advanced Face Detection and Human Detection Mobile Alerts
- Indoor multi-axis ceiling or wall mountable with RJ45 and 12V DC
- Compact Metal Vandal structure design with unbreakable Vandalized Glass

Technical Specifications:

Model	iV-D21VWA-iP4-POE
Image Sensor	4MP 1/2.8" Sony IMX 423 low illumination CMOS sensor, color 0.01Lux@F1.2, black/white 0.001Lux@F1.2
Resolution	2304*1580 , 4 Megapixels
Network Interface	1*RJ45 10/100M adaptive Ethernet port; Supports RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
Reliability	7 * 24 hours 65 °C high temperature stable and reliable testing (including mounted machine testing)
Video Compression & Frame Rate	H.265 & H.265++, Supports dual stream 2304*1580(25fps), 1280*720(25fps); sub-stream: 704*576(25fps)
Video Bit Rate	0.1Mbps~6Mbps variable; 1~30f/s variable
Lens Type	4MP 3.6mm M12 Fuji FX Proline Glass Lens
Array or SMT LEDs	21 SMT Led with IR-Cut
Array or SMT illumination Distance	20 Meters
White Balance	Auto / Day / Night / Customized
Back Light Compensation & Audio Microphone	BLC / WDR ; Built in Microphone
Exposure Mode	Manual / Low noise / Low motion blur / Auto Ranges from 1/3 to 1/10000
Snapshot	Maximum 1 snapshot per second, saved as a JPEG.
Video Setup & Information	Supports parameter setup such as brightness and contrast, Channel title; Time title; Motion detection; Privacy mask
Motion Detection	Sensitivity level ranges from 0 to 100; Activation event: Video storage; Image snapshot; Log; Email function
Security	Multiple User Access levels with password protection
Automatic Electronic Shutter	Auto / Manual (1/3~1/10000 s)
Web Browser	Microsoft® Internet Explorer® 6.0 or later; Mozilla Firefox®; Google Chrome™ with Video Recorder attached
Supported Protocols	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP
Smart Phone & Tablet Compatibility	IOS; Android™
Standards	CE, FCC
Day / Night	Auto (ICR) / Color / B&W
Automatic Gain Control	Auto / Manual
Power Consumption	DC12V/2A input, power consumption: 10 Watts (Max)
Operational Temperature & Rating	-4°F to +140°C (-20°C to +60°C), IP66 Casing
Weight & Construction	0.80 kg, Housing: Metal Heavy Casing IP66 Color: White

Dimensions & Connection Diagram:

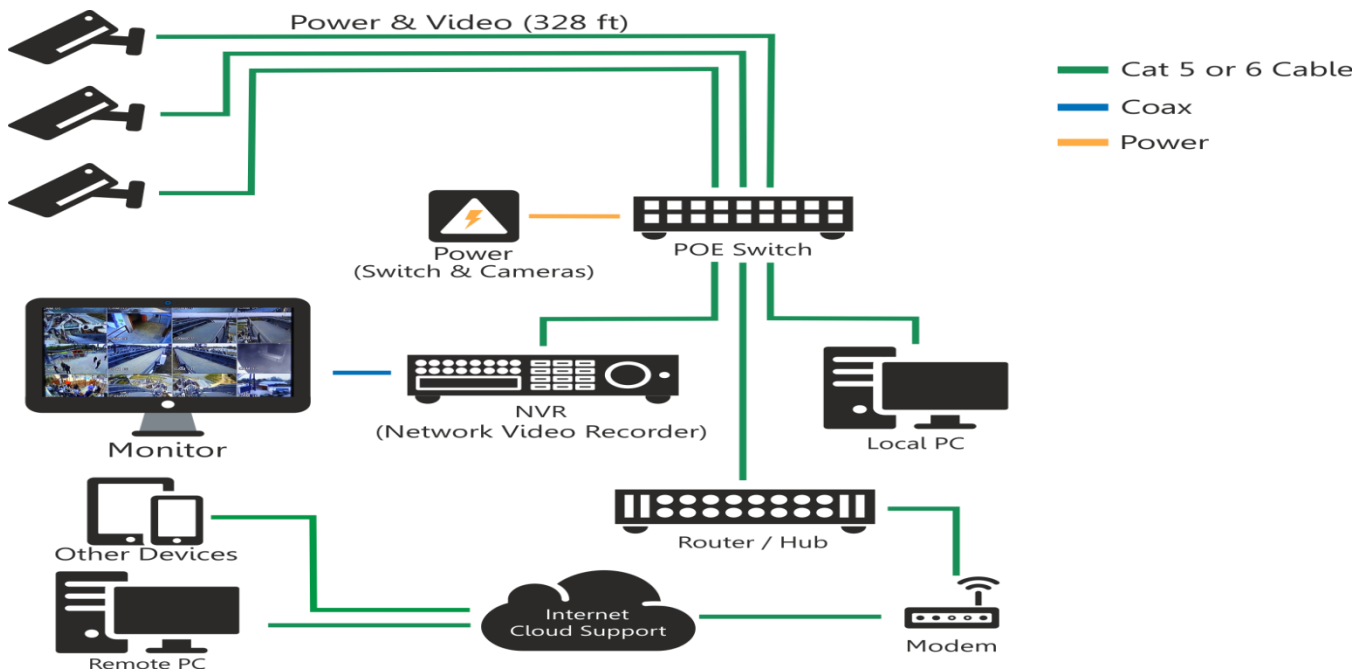

✉ info@ivpro.in 🌐 www.ivpro.in



scan this
QR Code

 **Customer Care**
care@ivpro.in



RoHS

Specifications are subject to change without notice.
iV-Pro is a trademark of iView Technologies Co, India & Hongkong.
Copyright 2017 iView Technologies Co. All rights reserved.