

IP-HD Megapixel iP8 POE Series

Model: **iV-DA2W-iP8-POE**



iV-Pro Model: iV-DA2W-iP8-POE is a Indoor 8 Megapixel 4K Full iP-HD POE Security Camera with the next generation Smart Pro 8238 Series image processing solution engineered to provide extremely crisp and clear images at minimal bandwidth. This Series includes a wide range of high performance lens that are built to deliver exceptional video images with true vivid colors and wide and clearer night vision, thanks to the new Array IR technology that promises better results and a longer life span over any Cat6 Cable with iV-Pro's POE Switches which can achieve a distance of up to 100 Meters to 250 Meters including long distance transmission of up to 20 Kilometers using Fiber Optic Cables with iV-Pro s Fiber Port Switches.



Features

- 8 Megapixel 4K Full HD Resolution with Array IR up to 25 Meters
- H.265++ Compression with low bandwidth data for longer recordings
- Flexible choice of 8MP CS lens from 3.6mm, 4.0mm and 6.0mm
- Smart Array IR technology provides even distribution of IR light
- Plug and Play ONVIF profile Compatible with iV-Pro's range of NVRs
- Accurate color rendering WDR technology for Lightning conditions
- Advanced Face Detection and Human Detection Mobile Alerts
- Indoor multi-axis ceiling or wall mountable with RJ45 and 12V DC
- Compact High quality structure design for Indoor use only

Technical Specifications:

Model	iV-DA2W-iP8-POE
Image Sensor	8MP 1/2" Smart Pro 8238 low illumination CMOS sensor ,color 0.01Lux@F1.2,black/white 0.001Lux@F1.2
Resolution	3840*2160 , 8 Megapixels 4K
Network Interface	1*RJ45 10/100M adaptive Ethernet port; Supports RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
Reliability	7 * 24 hours 65 °C high temperature stable and reliable testing (including mounted machine testing)
Video Compression & Frame Rate	H.265 & H.265++, Supports dual stream 3840*2160(15fps),1280*720(25fps);sub-stream: 704*576(25fps)
Video Bit Rate	0.1Mbps~10Mbps variable;1~30f/s variable
Lens Type	8MP 3.6mm CS Fuji FX Proline Glass Lens
Array or SMT LEDs	2 Array IR Led with IR-Cut
Array or SMT illumination Distance	25 Meters
White Balance	Auto / Day / Night / Customized
Back Light Compensation	BLC / WDR
Exposure Mode	Manual / Low noise / Low motion blur / Auto Ranges from 1/3 to 1/10000
Snapshot	Maximum 1 snapshot per second, saved as a JPEG.
Video Setup & Information	Supports parameter setup such as brightness and contrast, Channel title; Time title; Motion detection; Privacy mask
Motion Detection	Sensitivity level ranges from 0 to 100; Activation event: Video storage; Image snapshot; Log; Email function
Security	Up to 20 users, Multiple User Access levels with password protection
Automatic Electronic Shutter	Auto / Manual (1/3~1/10000 s)
Web Browser	Microsoft® Internet Explorer® 6.0 or later; Mozilla Firefox®; Google Chrome™
Supported Protocols	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP
Smart Phone & Tablet Compatibility	IOS; Android™
Standards	ONVIF Profile, CE, FCC
Day / Night	Auto (ICR) / Color / B&W
Automatic Gain Control	Auto / Manual
Power Consumption	DC12V/2A input, power consumption: 10Watts (Max)
Operational Temperature & Rating	-4°F to +140°C (-20°C to +60°C), IP65 Casing
Weight & Construction	0.65 kg, Housing: Plastic Heavy Casing Molded Color: White

Dimensions & Connection Diagram:

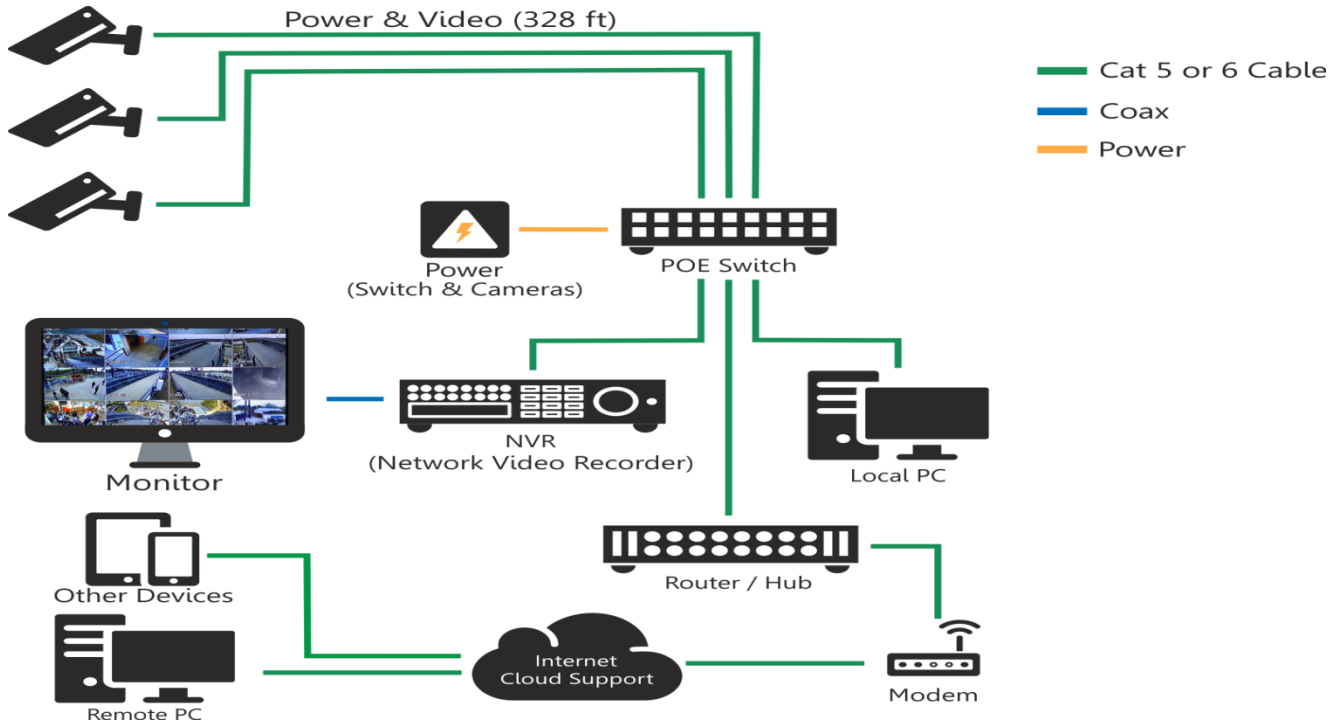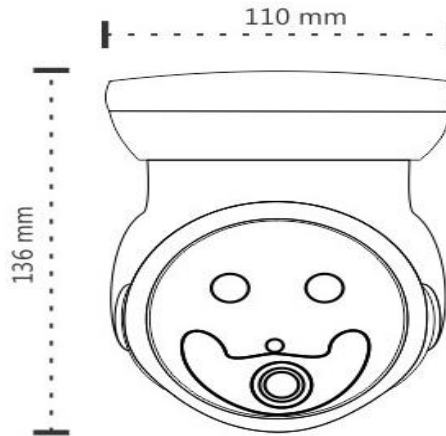

✉ info@ivpro.in 🌐 www.ivpro.in



scan this QR Code

 **Customer Care**
care@ivpro.in



RoHS

Specifications are subject to change without notice.
iV-Pro is a trademark of iView Technologies Co, India & Hongkong.
Copyright 2017 iView Technologies Co. All rights reserved.